



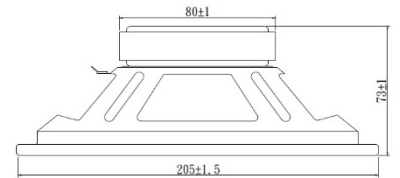

# SPEAKER MODEL : 205CR

## DESCRIPTION SPEAKER

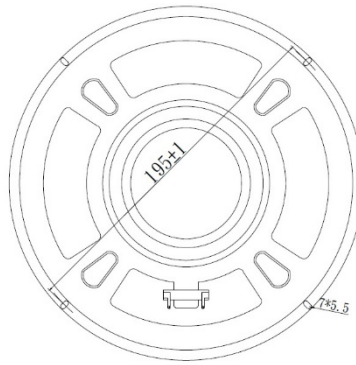

## SPEAKER SPECIFICATION

Outer Dimensions	205mm(See attached drawing)		
Rated (Max.)Input	30W ( 50 W)		
Voice Coil Imp.	8 ± 1.2	Ω ( 250 Hz 1 V )	
Lowest Resonance Frequency ( fo )	64 ± 13	Hz ( 1 V )	
Sound Pressure Level	95± 2 dB ( 1 w 0.5 m ) at(0.25)(0.3)(0.4)(0.5)KHZ		
Frequency Response Deviation	FO Hz ~ 10 KHz max -10 dB		
Operating temperature	-20 +70 ± 2	°C	Hours 2 0 ~ 5 0 % R.H.
Load test	White noise at 30 W 48 hours		
Weight	752 g		

Other non-stipulated matters are based on CNS4784 4785 4786 based on JIS.C. 5530 5531

## FREQUENCY RESPONSE CURVE<sup>(7\*18)</sup>

