



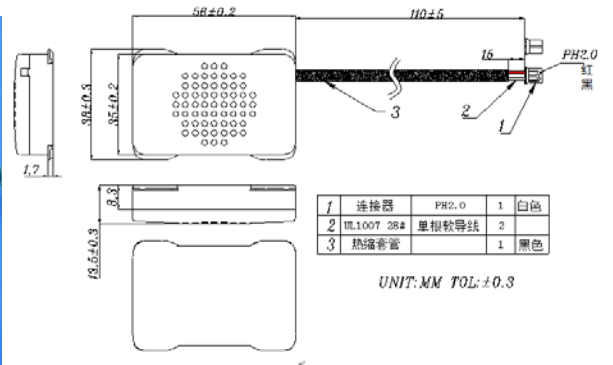

Micro SPEAKER MODEL : 28R-BOXL(38W56)-AS

DESCRIPTION SPEAKER

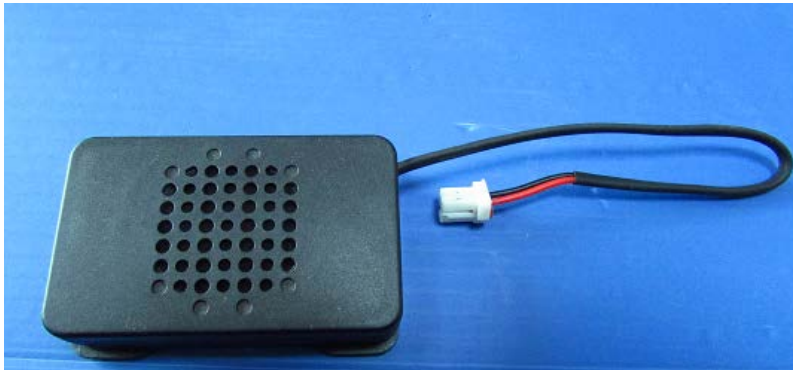

SPEAKER SPECIFICATION

Outer Dimensions	38*56 mm(See attached drawing)				
Rated (Max.)Input	1.0 W (2.0W)				
Voice Coil Imp.	8 ± 1.2	Ω	(1000	Hz	1 V)
Lowest Resonance Frequency (fo)	240 ± 48	Hz	(1 V)		
Sound Pressure Level	95 ± 2	dB	(0.1 w 0.1 m)	at(1.0)(1.2)(1.5)(2.0)KHZ	
Frequency Response Deviation	FO Hz ~ 20 KHz max -10 dB				
Operating temperature	-20 +50 ± 2	°C	Hours	2 0 ~ 5 0 % R.H.	
Load test	White noise at 3.0 W 48 hours				
Weight	15.9 g				

Other non-stipulated matters are based on CNS4784 4785 4786 based on JIS.C. 5530 5531

FREQUENCY RESPONSE CURVE^(7*18)

