




# SPEAKER MODEL : 28R-TA

## DESCRIPTION SPEAKER

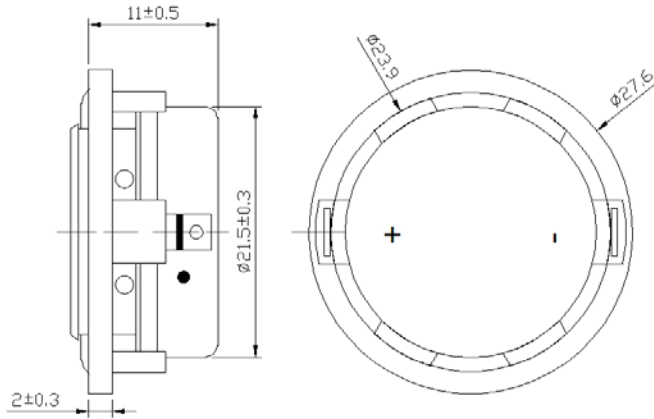

## SPEAKERSPECIFICATION

Outer Dimensions	28 mm(See attached drawing)		
Rated (Max.)Input	2.5W (3W)		
Voice Coil Imp.	4 ± 0.6	Ω	( 1200 Hz 1 V )
Lowest Resonance Frequency ( fo )	300 ± 60	Hz	( 1 V )
Sound Pressure Level	99 ± 2	dB	( 1 w 0.1 m ) at(1.0)(1.2)(1.5)(2.0)KHZ
Frequency Response Deviation	FO 200 Hz ~ 20 KHz max -10 dB		
Operating temperature	-20 +70 ± 2	°C	Hours 20 ~ 50 % R.H.
Load test	White noise at 3 W 48 hours		
Weight	18 g		

Other non-stipulated matters are based on CNS4784 4785 4786 based on JIS.C. 5530 5531

## FREQUENCY RESPONSE CURVE<sub>(7\*18)</sub>

