



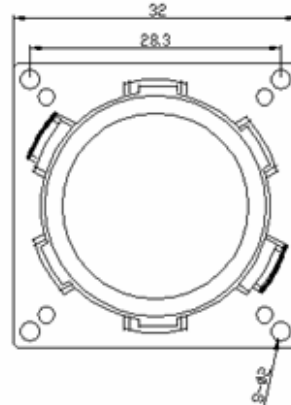

SPEAKER MODEL : 32S-TA

DESCRIPTION SPEAKER

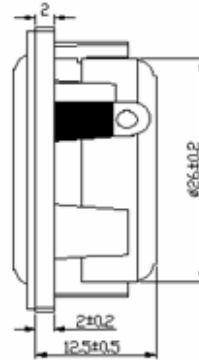

SPEAKERSPECIFICATION

Outer Dimensions	32 mm(See attached drawing)				
Rated (Max.)Input	3W (5W)				
Voice Coil Imp.	16	±	2.4	Ω	(1400 Hz 1 V)
Lowest Resonance Frequency (fo)	350 ±	70	Hz (1 V)		
Sound Pressure Level	97	± 2	dB	(1 w 0.1 m) at(0.4)(0.6)(0.8)(1.0)KHZ	
Frequency Response Deviation	FO 250 Hz ~ 20 KHz max -10 dB				
Operating temperature	-20	+70 ± 2	℃	Hours	2 0 ~ 5 0 % R.H.
Load test	White noise at 5 W 48 hours				
Weight	34 g				

Other non-stipulated matters are based on CNS4784 4785 4786 based on JIS.C. 5530 5531

FREQUENCY RESPONSE CURVE^(7*18)

