




SPEAKER MODEL : 33R-TA

DESCRIPTION SPEAKER

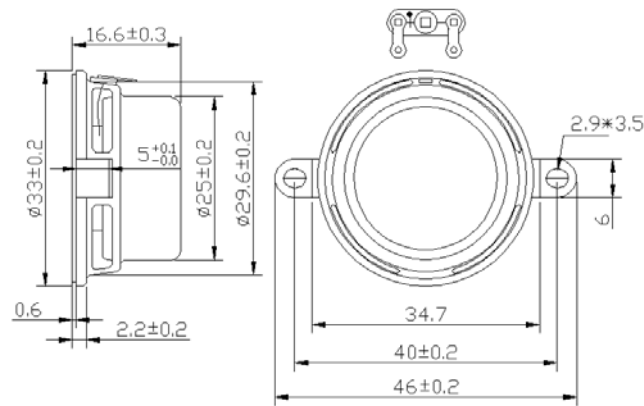

SPEAKERSPECIFICATION

Outer Dimensions	33mm(See attached drawing)				
Rated (Max.)Input	2W (3W)				
Voice Coil Imp.	4	±	0.6	Ω	(1100 Hz 1 V)
Lowest Resonance Frequency (fo)	300 ±	70	Hz (1 V)		
Sound Pressure Level	74	±	2	dB	(1 w 1m) at(0.4)(0.6)(0.8)(1.0)KHZ
Frequency Response Deviation	FO 250 Hz ~ 20 KHz max -10 dB				
Operating temperature	-20	+70	±	2	°C Hours 20 ~ 50 % R.H.
Load test	White noise at 3 W 48 hours				
Weight	27 g				

Other non-stipulated matters are based on CNS4784 4785 4786 based on JIS.C. 5530 5531

FREQUENCY RESPONSE CURVE^(7*18)

