




Micro SPEAKER MODEL :36R-A-AS

DESCRIPTION SPEAKER

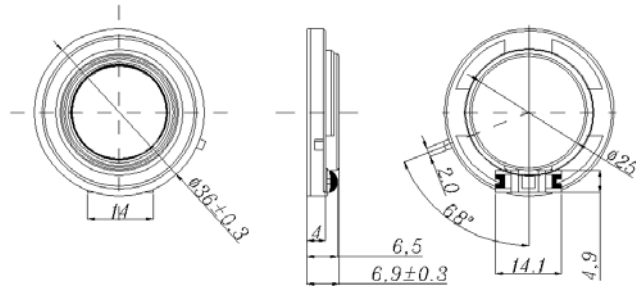

SPEAKER SPECIFICATION

Outer Dimensions	36 mm(See attached drawing)				
Rated (Max.)Input	2.0 W (2.5W)				
Voice Coil Imp.	8	±	1.2	Ω	(600 Hz 1 V)
Lowest Resonance Frequency (fo)	350	±	52	Hz	(1 V)
Sound Pressure Level	93	±	2	dB	(1 w 0.1 m) at(1.0)(1.2)(1.5)(2.0)KHZ
Frequency Response	Deviation	FO Hz ~	20 KHz max	-10 dB	
Operating temperature	-20	+70	± 2	°C	Hours 2 0 ~ 5 0 % R.H.
Load test	White noise at 2.0W 48 hours				
Weight	13.3 g				

Other non-stipulated matters are based on CNS4784 4785 4786 based on JIS.C. 5530 5531

FREQUENCY RESPONSE CURVE

