




SPEAKER MODEL : 40R-TA

DESCRIPTION SPEAKER

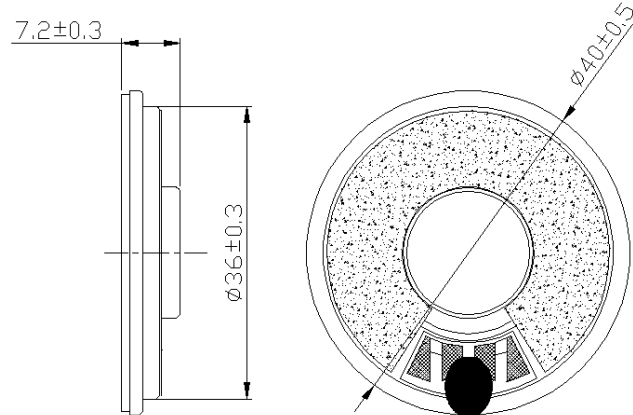

SPEAKERSPECIFICATION

Outer Dimensions	40mm(See attached drawing)				
Rated (Max.)Input	0.5W (1W)				
Voice Coil Imp.	8	±	1.2	Ω	(1500Hz 1 V)
Lowest Resonance Frequency (fo)	280 ±	56	Hz	(1 V)	
Sound Pressure Level	79	±	2	dB	(1 w 1m) at(0.8)(1.0)(1.2)(1.5)KHZ
Frequency Response Deviation	FO 220 Hz ~ 20 KHz max -10 dB				
Operating temperature	-20	+70 ±	2	°C	Hours 20 ~ 50 % R.H.
Load test	White noise at 1 W 48 hours				
Weight	10.5 g				

Other non-stipulated matters are based on CNS4784 4785 4786 based on JIS.C. 5530 5531

FREQUENCY RESPONSE CURVE^(7*18)

