




SPEAKER MODEL : 40RR

DESCRIPTION SPEAKER

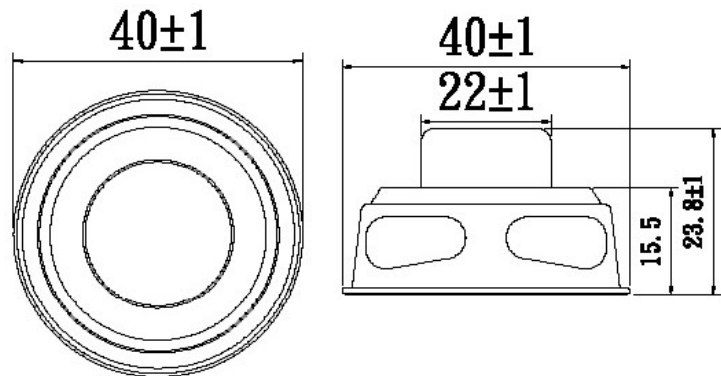

SPEAKER SPECIFICATION

Outer Dimensions	40mm(See attached drawing)				
Rated (Max.)Input	3W (5W)				
Voice Coil Imp.	8	± 1.2	Ω (600	Hz 1 V)	
Lowest Resonance Frequency (fo)	150	±	30	Hz (1 V)	
Sound Pressure Level	87± 2 dB (1 w 0.5 m) at(0.6)(0.8)(1.0)(1.2)KHZ				
Frequency Response Deviation	FO Hz ~ 20 KHz max -10 dB				
Operating temperature	-20	+70 ± 2	℃	Hours	2 0 ~ 5 0 % R.H.
Load test	White noise at 3 W 48 hours				
Weight	32.7 g				

Other non-stipulated matters are based on CNS4784 4785 4786 based on JIS.C. 5530 5531

FREQUENCY RESPONSE CURVE^(7*18)

