




SPEAKER MODEL : 46SR

DESCRIPTION SPEAKER

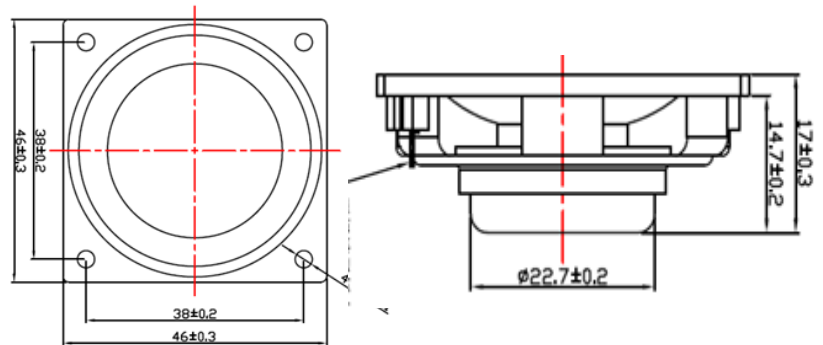

SPEAKER SPECIFICATION

Outer Dimensions	46 mm(See attached drawing)				
Rated (Max.)Input	10 W (12 W)				
Voice Coil Imp.	4 ± 0.6	Ω	(1000	Hz	1 V)
Lowest Resonance Frequency (fo)	280 ± 56	Hz	(1 V)		
Sound Pressure Level	83± 2	dB	(1 w 0.5 m)	at(0.6)(0.8)(1.0)(1.2)KHZ	
Frequency Response Deviation	FO Hz ~	20 KHz max	-10 dB		
Operating temperature	-20 +70 ± 2	℃	Hours	2 0 ~ 5 0 %	R.H.
Load test	White noise at 10 W 48 hours				
Weight	28 g				

Other non-stipulated matters are based on CNS4784 4785 4786 based on JIS.C. 5530 5531

FREQUENCY RESPONSE CURVE^(7*18)

