



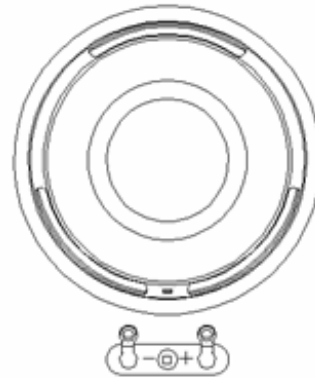

# SPEAKER MODEL : 50R-A-TA

## DESCRIPTION SPEAKER

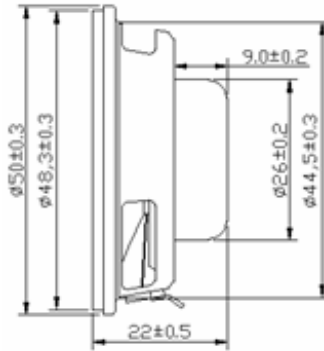

## SPEAKERSPECIFICATION

Outer Dimensions	50mm(See attached drawing)		
Rated (Max.)Input	2W (3W)		
Voice Coil Imp.	4 ± 0.6	Ω	( 800 Hz 1 V )
Lowest Resonance Frequency ( fo )	170 ± 34	Hz	( 1 V )
Sound Pressure Level	79 ± 2	dB	( 1 w 1m ) at(0.4)(0.6)(0.8)(1.0)KHZ
Frequency Response Deviation	FO 135 Hz ~ 20 KHz max -10 dB		
Operating temperature	-20 +70 ± 2	°C	Hours 2 0 ~ 5 0 % R.H.
Load test	White noise at 3 W 48 hours		
Weight	45 g		

Other non-stipulated matters are based on CNS4784 4785 4786 based on JIS.C. 5530 5531

## FREQUENCY RESPONSE CURVE<sup>(7\*18)</sup>

