



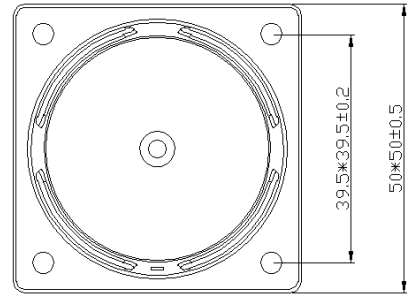

SPEAKER MODEL : 50S-TA

DESCRIPTION SPEAKER

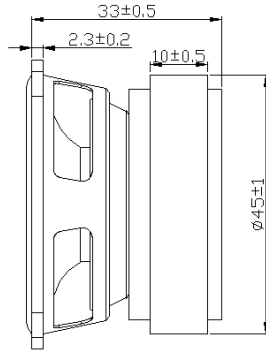

SPEAKERSPECIFICATION

| | |
|-----------------------------------|--|
| Outer Dimensions | 50*50mm(See attached drawing) |
| Rated (Max.)Input | 5W (8W) |
| Voice Coil Imp. | 8 ± 1.2 Ω (600 Hz 1 V) |
| Lowest Resonance Frequency (fo) | 160 ± 32 Hz (1 V) |
| Sound Pressure Level | 77 ± 2 dB (1 w 1m) at(0.4)(0.6)(0.8)(1.0)KHZ |
| Frequency Response Deviation | FO 135 Hz ~ 20 KHz max -10 dB |
| Operating temperature | -20 +70 ± 2 °C Hours 20 ~ 50 % R.H. |
| Load test | White noise at 8 W 48 hours |
| Weight | 135 g |

Other non-stipulated matters are based on CNS4784 4785 4786 based on JIS.C. 5530 5531

FREQUENCY RESPONSE CURVE^(7*18)

