



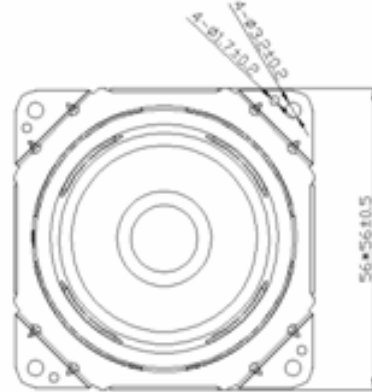

SPEAKER MODEL :56S-TA

DESCRIPTION SPEAKER

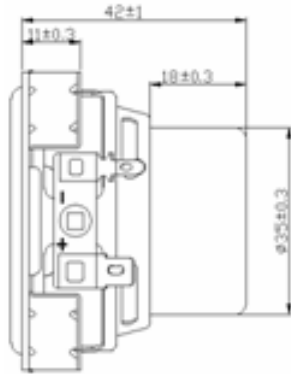

SPEAKERSPECIFICATION

Outer Dimensions	56*56mm(See attached drawing)
Rated (Max.)Input	8W (12W)
Voice Coil Imp.	8 ± 1.2 Ω (600Hz 1 V)
Lowest Resonance Frequency (fo)	105 ± 21 Hz (1 V)
Sound Pressure Level	84 ± 2 dB (1 w 0.5m) at(0.4)(0.6)(0.8)(1.0)KHZ
Frequency Response Deviation	FO 75 Hz ~ 20 KHz max -10 dB
Operating temperature	-20 +70 ± 2 °C Hours 2 0 ~ 5 0 % R.H.
Load test	White noise at 12 W 48 hours
Weight	84 g

Other non-stipulated matters are based on CNS4784 4785 4786 based on JIS.C. 5530 5531

FREQUENCY RESPONSE CURVE^(7*18)

