



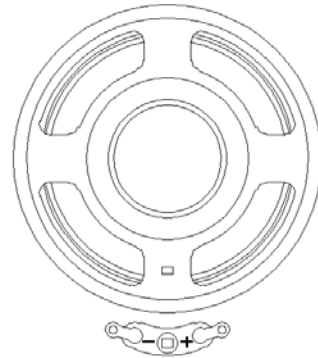

SPEAKER MODEL : 57R-A-TA

DESCRIPTION SPEAKER

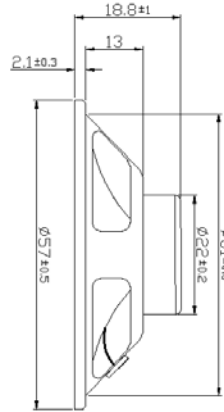

SPEAKERSPECIFICATION

Outer Dimensions	57mm(See attached drawing)		
Rated (Max.)Input	0.3W (0.5W)		
Voice Coil Imp.	$8 \pm 1.2 \Omega$ (1000 Hz 1 V)		
Lowest Resonance Frequency (fo)	260 ± 52 Hz (1 V)		
Sound Pressure Level	86± 2 dB (1 w1m) at(0.6)(0.8)(1.0)(1.2)KHZ		
Frequency Response Deviation	FO 210 Hz ~ 20 KHz max -10 dB		
Operating temperature	-20 +70 ± 2 °C	Hours	20 ~ 50 % R.H.
Load test	White noise at 0.5 W 48 hours		
Weight	26 g		

Other non-stipulated matters are based on CNS4784 4785 4786 based on JIS.C. 5530 5531

FREQUENCY RESPONSE CURVE^(7*18)

