



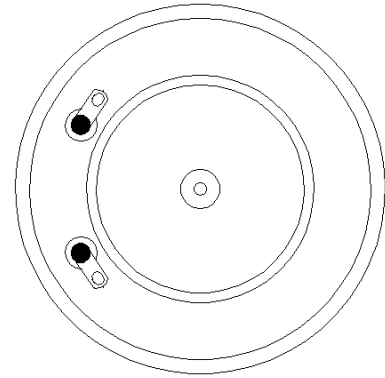

SPEAKER MODEL : 57R-TA

DESCRIPTION SPEAKER

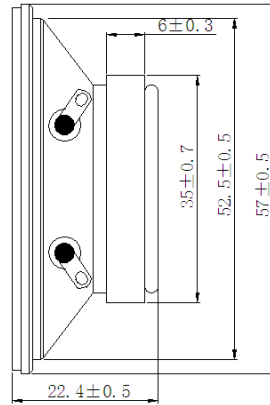

SPEAKERSPECIFICATION

Outer Dimensions	57mm(See attached drawing)
Rated (Max.)Input	5W (9W)
Voice Coil Imp.	$8 \pm 2 \ \Omega$ (1950 Hz 1 V)
Lowest Resonance Frequency (fo)	1500 ± 300 Hz (1 V)
Sound Pressure Level	100 ± 2 dB (1 w1m) at(1.5)KHZ
Frequency Response Deviation	FO 1200 Hz ~ 1800KHz max -10 dB
Operating temperature	-20 +70 ± 2 °C Hours 20 ~ 50 % R.H.
Load test	White noise at 9 W 48 hours
Weight	66 g

Other non-stipulated matters are based on CNS4784 4785 4786 based on JIS.C. 5530 5531

FREQUENCY RESPONSE CURVE^(7*18)

