



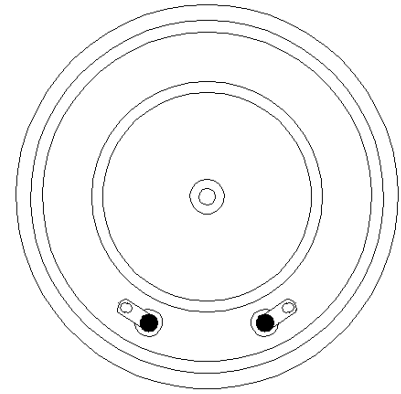

SPEAKER MODEL : 66R-TA

DESCRIPTION SPEAKER

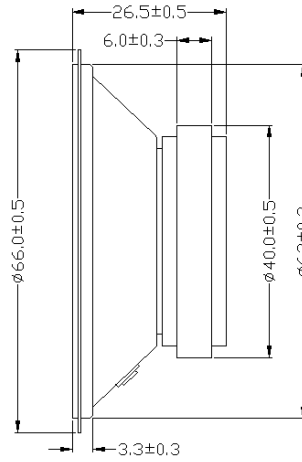

SPEAKERSPECIFICATION

Outer Dimensions	66mm(See attached drawing)		
Rated (Max.)Input	10W (12W)		
Voice Coil Imp.	8 ± 2 Ω (1400 Hz 1 V)		
Lowest Resonance Frequency (fo)	1300 ± 260	Hz (1 V)	
Sound Pressure Level	102 ± 2	dB (1 w1m) at(1.3)KHZ	
Frequency Response Deviation	FO 1000Hz ~ 1600KHz max -10 dB		
Operating temperature	-20 +70 ± 2	°C	Hours 20 ~ 50 % R.H.
Load test	White noise at 12 W 48 hours		
Weight	92 g		

Other non-stipulated matters are based on CNS4784 4785 4786 based on JIS.C. 5530 5531

FREQUENCY RESPONSE CURVE^(7*18)

