




SPEAKER MODEL : 66R

DESCRIPTION SPEAKER

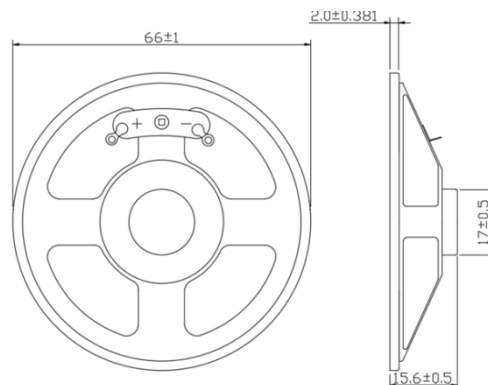

SPEAKER SPECIFICATION

Outer Dimensions	66mm(See attached drawing)				
Rated (Max.)Input	3W (5 W)				
Voice Coil Imp.	8	±	1.2	Ω	(700 Hz 1 V)
Lowest Resonance Frequency (fo)	300	±	60	Hz	(1 V)
Sound Pressure Level	93	±	2 dB	(1 w 0.5 m)	at(0.6)(0.8)(1.0)(1.2)KHZ
Frequency Response Deviation	FO Hz	~	20 KHz max	-10 dB	
Operating temperature	-20	+70	± 2	°C	Hours 2 0 ~ 5 0 % R.H.
Load test	White noise at 3 W 48 hours				
Weight	22 g				

Other non-stipulated matters are based on CNS4784 4785 4786 based on JIS.C. 5530 5531

FREQUENCY RESPONSE CURVE^(7*18)

