



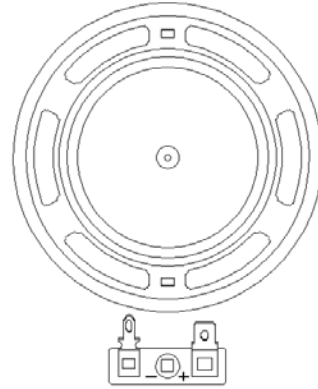

SPEAKER MODEL : 77R-TA

DESCRIPTION SPEAKER

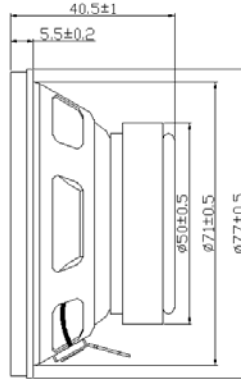

SPEAKERSPECIFICATION

Outer Dimensions	77mm(See attached drawing)		
Rated (Max.)Input	2W (3W)		
Voice Coil Imp.	$8 \pm 1.2 \Omega$ (450 Hz 1 V)		
Lowest Resonance Frequency (fo)	140 ± 28 Hz (1 V)		
Sound Pressure Level	85 ± 2 dB (1 w 1m) at(0.5)(0.6)(0.7)(0.8)KHZ		
Frequency Response Deviation	FO 90 Hz ~ 20 KHz max -10 dB		
Operating temperature	$-20 +70 \pm 2$ °C	Hours	20 ~ 50 % R.H.
Load test	White noise at 3W 48 hours		
Weight	190 g		

Other non-stipulated matters are based on CNS4784 4785 4786 based on JIS.C. 5530 5531

FREQUENCY RESPONSE CURVE^(7*18)

